

R6D-52SSC

1. Color	Red
2. Material	AlGaInP / Si
3. Electrode	N side (cathode) : Au / P side (anode) : Au
4. Electrode pattern	(Figure 1)
5. Chip size	500 μ m×500 μ m×190 μ m (Figure 1)
6. Electro-Optical characteristics (Ta=25°C)	(Table 1)
7. Absolute maximum rating	(Table 2, Figure 2)
8. Technical data	
8-1. Characteristic curves	(Figure 3~9)
8-2. Reliability	(Figure 10~15)
9. Features	
- High power	
- Good reliability	

Figure 1. Electrode pattern and Chip size (Unit : μ m)

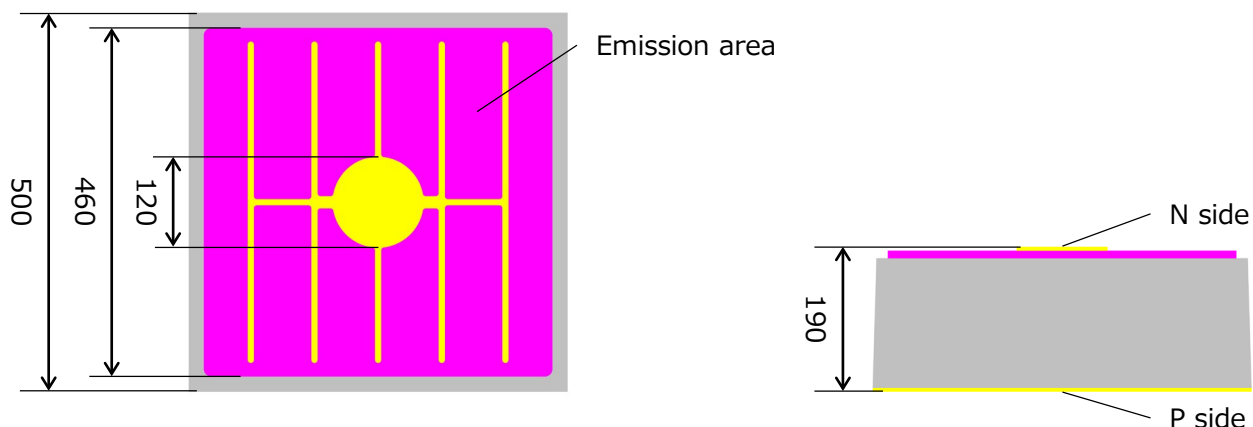


Table 1. Electro-Optical characteristics (Ta=25°C)


Parameters	Symbol	Condition	Min.	Typ.	Max.	Unit
Power*	IV	IF=150mA	4,900	6,000	7,100	mcd
Forward Voltage	VF	IF=150mA	2.00	2.20	2.35	V
Dominant Wavelength	λ_d	IF=20mA	610	615	625	nm
Reverse Current	IR	VR=5V	—	—	10	μ A

* Power : Measurement at RESONAC PHOTONICS.

Table 2. Absolute maximum rating

Item	Symbol	Rating	Unit
Forward Current	IF	200	mA
Reverse Voltage	VR	5	V
Junction Temperature	Tj	130	°C

Figure 2. Ta-Absolute maximum rated current

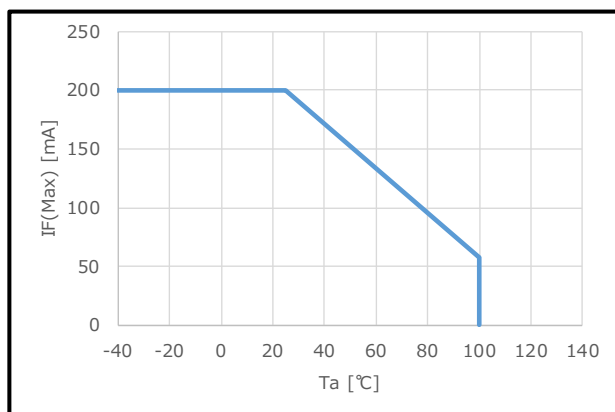

RESONAC PHOTONICS' standard condition : LED chip mounted on TO-18 gold header, without resin coating.

* The absolute Maximum Rating means that there is a possibility to break down if exceeded momentarily, and does not guarantee to use on this condition considering reliability.

* You should establish the absolute Maximum Ratings of device after packaging under your responsibility, as those largely depend on the design of package and packaging condition.

The information contained herein is believed to be reliable.

However, no representations, guaranties or warranties of any kind are made as to accuracy and suitability of the Product for particular applications or the results of its use.

RESONAC PHOTONICS reserves the right to introduce changes without notice.

Characteristic curves (TO-18 stem without resin)

Figure 3. IF-IV ($T_a=25^\circ\text{C}$)

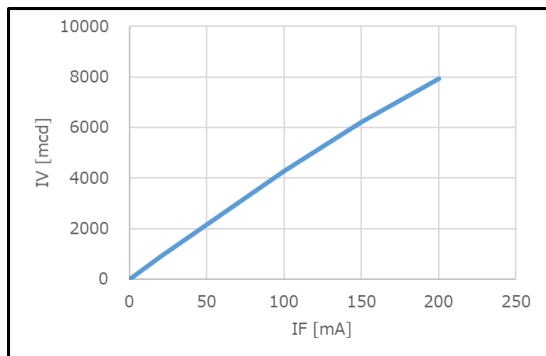


Figure 7. T_a -Relative IV

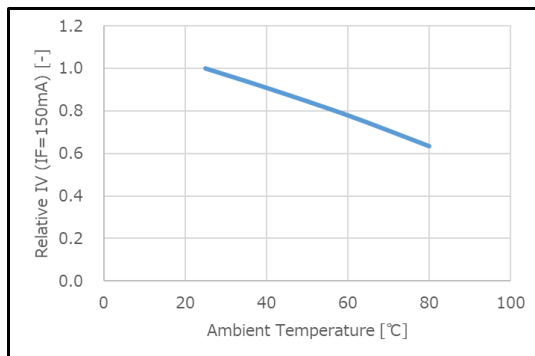


Figure 4. VF-IF ($T_a=25^\circ\text{C}$)

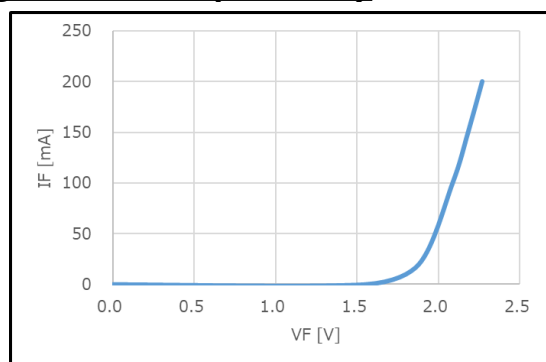


Figure 8. T_a -VF

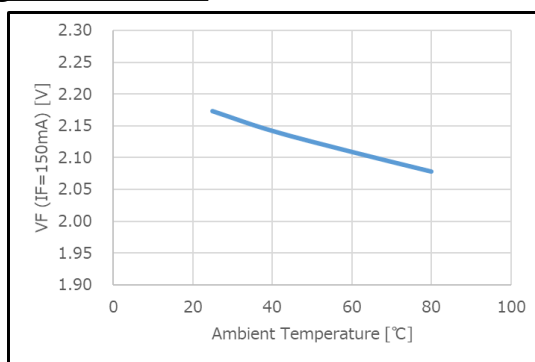


Figure 5. Emission spectrum ($T_a=25^\circ\text{C}$)

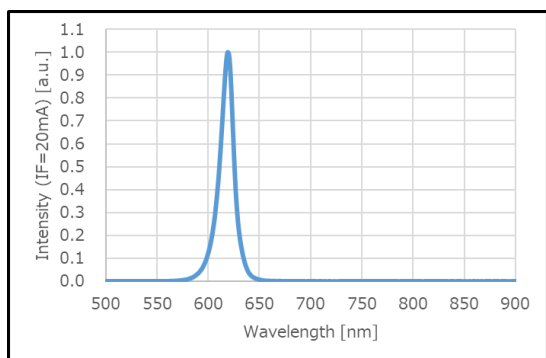


Figure 9. T_a - λ_d


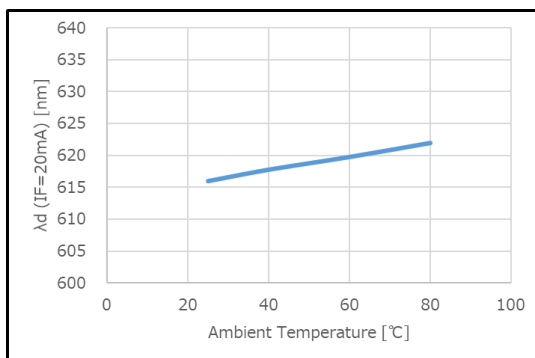


Figure 6. Emission distribution ($T_a=25^\circ\text{C}$)

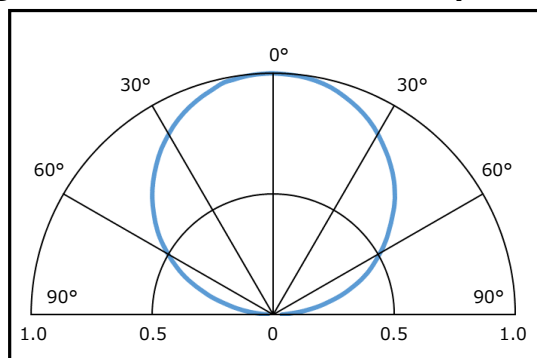

The data on this page are examples measured at RESONAC PHOTONICS, and they are not guaranteed.

Reliability

Figure 10. 25°C 200mA 1,000h test (TO-46 stem with heatsink)

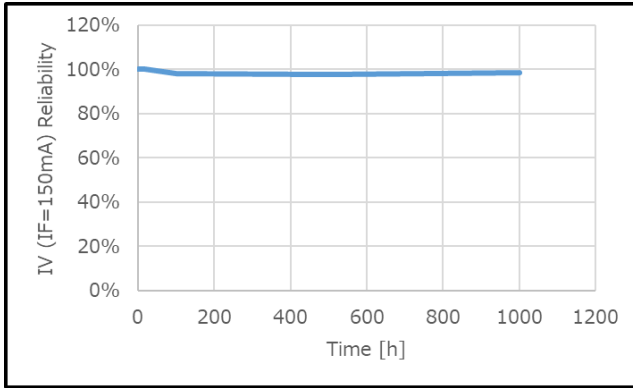


Figure 13. -40°C 20mA 1,000h test (TO-18 stem with epoxy resin)

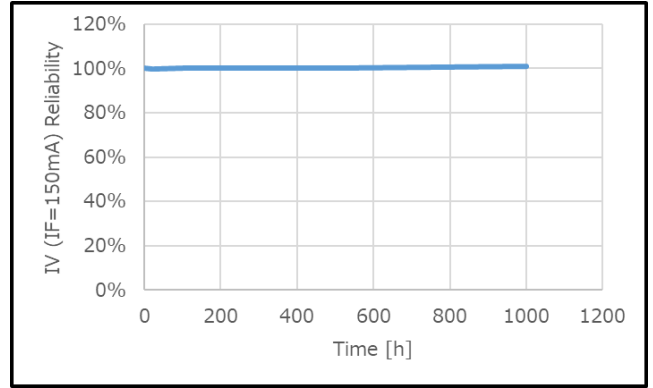


Figure 11. 140°C 20mA 1,000h test (TO-18 stem without resin)

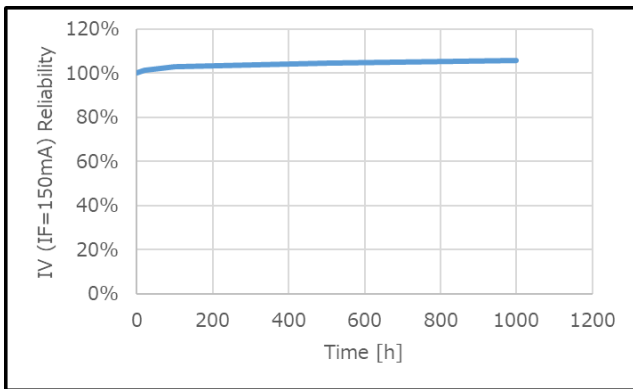


Figure 14. 140°C storage 1,000h test (TO-18 stem without resin)

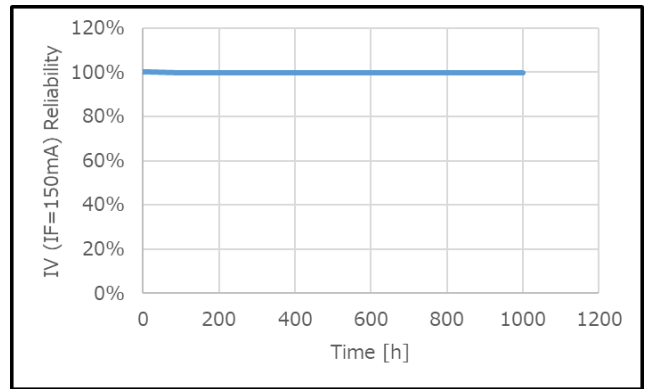


Figure 12. 85°C,85% 20mA 1,000h test (TO-18 stem without resin)


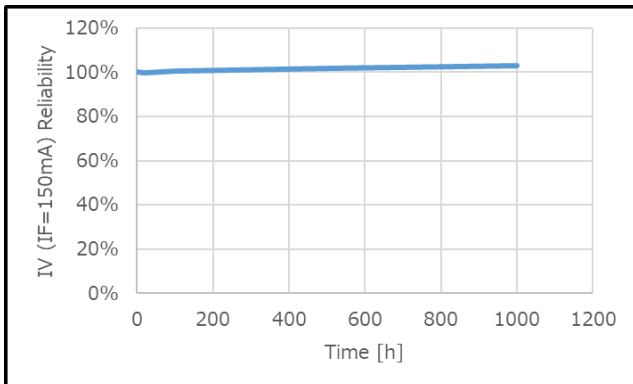


Figure 15. 85°C,85% storage 1,000h test (TO-18 stem without resin)

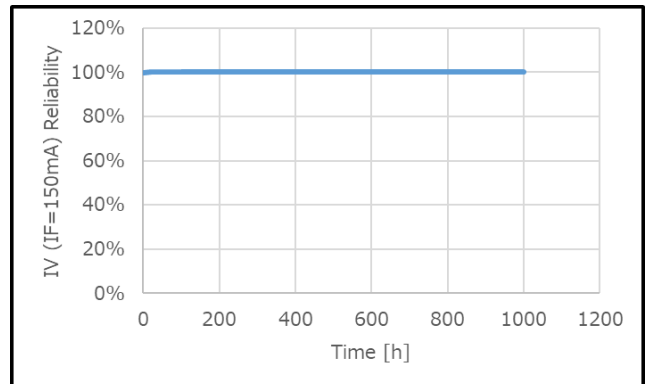

The data on this page are examples measured at RESONAC PHOTONICS, and they are not guaranteed.